


Corridor Lockers

Installation Instructions

Thank you for selecting Pinnacle Lockers. We are confident that the quality and construction of our lockers will prove to be a good investment. These instructions are intended to assist you in a typical wall anchored locker installation. Individual job conditions will dictate the type of fasteners and whether the lockers must be anchored to the wall, the floor, or both.

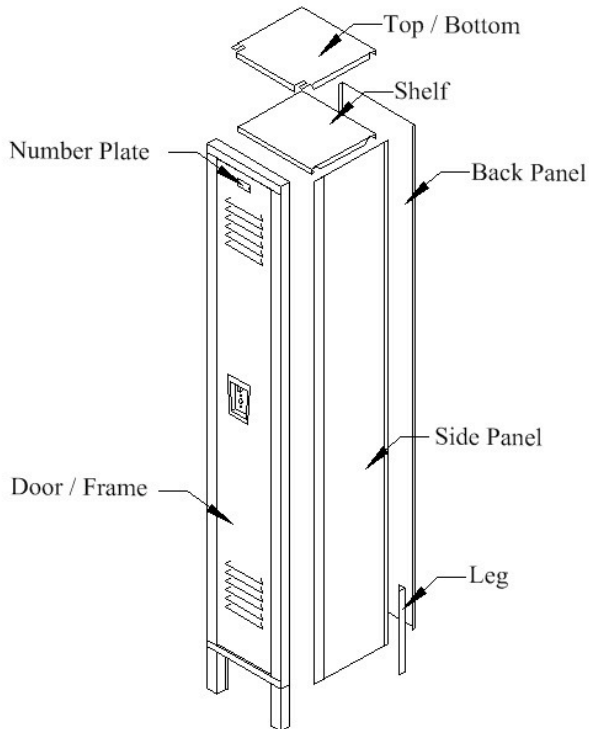

Assembly of Single Row Lockers

1. Lay down the back panel with the flanges facing up and the two closer leg mounting holes at the bottom. Loosely attach the leg to the back panel, using two bolts and nuts. Loosely attach the second leg to the opposite side of the back panel in the same manner.
2. Attach one side panel to the inside of the flange of the back panel. The edge of the side panel should be between the back panel and the leg installed in step 1. Align the holes and secure with bolts and nuts.
3. Bolt the top, bottom and shelves to the side panel. Note that the top and bottom are identical. Make certain that their fronts are in the correct position. Secure the second side panel to the unit, keeping it on the inside of the back panel. Bolt the shelves to the sides.
4. Place the door frame over the assembled locker and fasten. Make certain that the sides are inside the door frame.
5. Tighten all nuts and bolts.
6. For group building, use common side panels and build in easily manageable groups.

Notes:

When lockers are set in place, care must be taken to assure lockers are set plumb and true before anchoring. Lockers are not designed as free-standing structures. Lockers must be anchored securely to walls and/or floors with fasteners. **WARNING: Failure to properly anchor lockers could cause them to topple.**

Adjust all doors to operate freely if required.

If built-in locks are installed, make certain locks operate properly before closing doors.



Call: 800. 637.9508

www.theshelvingstore.com

